

Pressure Barrier Double Nipple NPT 1" / NPT 1"


The Pressure Barrier Double Nipple has two NPT 1" male threads. The integrated pressure glass protects the Flame Monitoring System against pressure applying of the combustion chamber.



1 | Technical data

| | |
|------------------------------------------|----------------------------------------------------------------------|
| Spectral sensitivity | 300 nm to 2700 nm |
| Pressure-Temperature Rating (p/T-Rating) | 25 bar to +280 °C (stainless steel) 40 bar to +300 °C (hastelloy) |
| Glass | borosilicate |
| Material | stainless steel 1.4462, hastelloy C22 2.4602 |
| Dimensions | 47 mm x 40 mm |
| Connections | NPT 1" male thread |
| Weight | approx. 0.75 kg |

2 | Dimensions

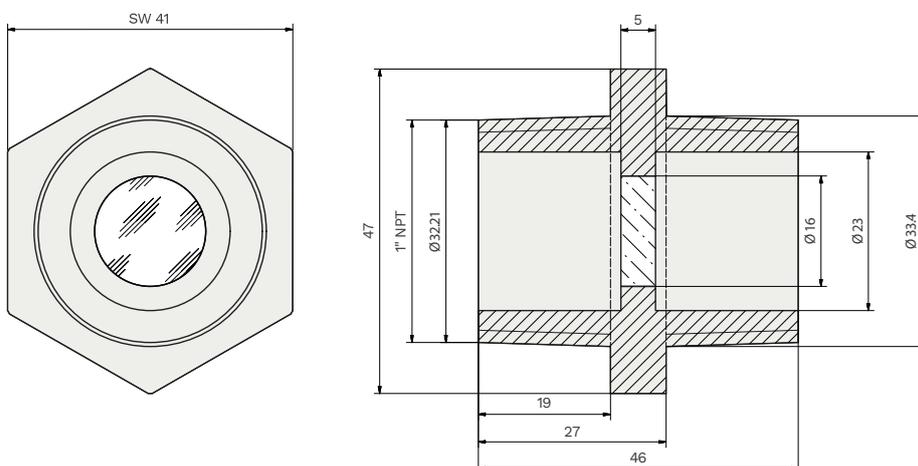

3 | Part numbers

| Material | Part numbers |
|-----------------|--------------|
| Stainless steel | 1595-8943-00 |
| Hastelloy | 1597-8943-00 |